

# Reading and Writing OpenEXR Image Files with the IlmImf Library

Last Update: 04/24/06

This document shows how to write C++ code that reads and writes OpenEXR image files. The text assumes that the reader is familiar with OpenEXR terms like "channel", "attribute", or "data window". For an explanation of those terms see the Technical Introduction to OpenEXR document. The OpenEXR source distribution contains a subdirectory, IlmImfExamples, with most of the code examples below. A Makefile is also provided, so that the examples can easily be compiled and run.

## Table of Contents

1 Scan-line-based and Tiled OpenEXR files.....	2
2 Using the RGBA-only Interface for Scan-line-based Files.....	3
2.1 Writing an RGBA Image File.....	3
2.2 Writing a Cropped Image.....	4
2.3 Storing Custom Attributes.....	5
2.4 Reading an RGBA Image File.....	5
2.5 Reading an RGBA Image File in Chunks.....	6
2.6 Reading Custom Attributes.....	7
2.7 Luminance/Chroma and Gray-Scale Images.....	8
3 Using the General Interface for Scan-line-based Files.....	9
3.1 Writing an Image File.....	9
3.2 Writing a Cropped Image.....	10
3.3 Reading an Image File.....	11
3.4 Interleaving Image Channels in the Frame Buffer.....	12
3.5 Which Channels are in a File?.....	13
3.6 Layers.....	14
4 Tiles, Levels and Level Modes.....	15
5 Using the RGBA-only Interface for Tiled Files.....	16
5.1 Writing a Tiled RGBA Image File with One Resolution Level.....	16
5.2 Writing a Tiled RGBA Image File with Mipmap Levels.....	17
5.3 Writing a Tiled RGBA Image File with Ripmap Levels.....	19
5.4 Reading a Tiled RGBA Image File.....	20
6 Using the General Interface for Tiled Files.....	21
6.1 Writing a Tiled Image File.....	21
6.2 Reading a Tiled Image File.....	21
7 Threads.....	23
7.1 Library Thread-Safety.....	23
7.2 Multithreaded I/O.....	23
7.3 Multithreaded I/O, Multithreaded Application Program.....	23
8 Low-Level I/O.....	25
8.1 Custom Low-Level File I/O.....	25
8.2 Memory-Mapped I/O.....	27
9 Miscellaneous.....	30
9.1 Is this an OpenEXR File?.....	30
9.2 Is this File Complete?.....	30
9.3 Preview Images.....	31
9.4 Environment Maps.....	33

## 1 Scan-line-based and Tiled OpenEXR files

In an OpenEXR file, pixel data can be stored either as scan lines or as tiles. Files that store pixels as tiles can also store multiresolution images. For each of the two storage formats (scan line or tile-based), the IlmImf library supports two reading and writing interfaces: the first, fully general, interface allows access to arbitrary channels, and supports many different in-memory pixel data layouts. The second interface is easier to use, but limits access to 16-bit (HALF) RGBA (red, green, blue, alpha) channels, and provides fewer options for laying out pixels in memory.

The interfaces for reading and writing OpenEXR files are implemented in the following eight C++ classes:

	tiles	scan lines	scan lines and tiles
arbitrary channels	TiledInputFile		InputFile
	TiledOutputFile	OutputFile	
RGBA only	TiledRgbaInputFile		RgbaInputFile
	TiledRgbaOutputFile	RgbaOutputFile	

The classes for reading scan-line-based images (`InputFile` and `RgbaInputFile`) can also be used to read tiled image files. This way, programs that do not need support for tiled or multiresolution images can always use the rather straightforward scan-line interfaces, without worrying about complications related to tiling and multiple resolutions. When a multiresolution file is read via a scan-line interface, only the highest-resolution version of the image is accessible.

## 2 Using the RGBA-only Interface for Scan-line-based Files

### 2.1 Writing an RGBA Image File

Writing a simple RGBA image file is fairly straightforward:

```
void
writeRgba1 (const char fileName[],
            const Rgba *pixels,
            int width,
            int height)
{
    RgbaOutputFile file (fileName, width, height, WRITE_RGBA);    // 1
    file.setFrameBuffer (pixels, 1, width);                       // 2
    file.writePixels (height);                                     // 3
}
```

Construction of an `RgbaOutputFile` object, in line 1, creates an OpenEXR header, sets the header's attributes, opens the file with the specified name, and stores the header in the file. The header's display window and data window are both set to  $(0, 0) - (width-1, height-1)$ . The channel list contains four channels, R, G, B, and A, of type `HALF`.

Line 2 specifies how the pixel data are laid out in memory. In our example, the `pixels` pointer is assumed to point to the beginning of an array of `width*height` pixels. The pixels are represented as `Rgba` structs, which are defined like this:

```
struct Rgba
{
    half r;    // red
    half g;    // green
    half b;    // blue
    half a;    // alpha (opacity)
};
```

The elements of our array are arranged so that the pixels of each scan line are contiguous in memory. The `setFrameBuffer()` function takes three arguments, `base`, `xStride`, and `ystride`. To find the address of pixel  $(x, y)$ , the `RgbaOutputFile` object computes

```
base + x * xStride + y * yStride.
```

In this case, `base`, `xStride` and `yStride` are set to `pixels`, 1, and `width`, respectively, indicating that pixel  $(x, y)$  can be found at memory address

```
pixels + 1 * x + width * y.
```

The call to `writePixels()`, in line 3, copies the image's pixels from memory to the file. The argument to `writePixels()`, `height`, specifies how many scan lines worth of data are copied.

Finally, returning from function `writeRgba1()` destroys the local `RgbaOutputFile` object, thereby closing the file.

Why do we have to tell the `writePixels()` function how many scan lines we want to write? Shouldn't the `RgbaOutputFile` object be able to derive the number of scan lines from the data window? The `IlmImf` library doesn't require writing all scan lines with a single `writePixels()` call. Many programs want to write scan lines individually, or in small blocks. For example, rendering computer-generated images can take a significant amount of time, and many rendering programs want to store each scan line in the image file as soon as all of the pixels for that scan line are available. This way, users can look at a partial image before rendering is finished. The `IlmImf` library allows writing the scan lines in top-to-bottom or bottom-to-top direction. The direction is defined by the file header's line order attribute (`INCREASING_Y` or `DECREASING_Y`). By default, scan lines are written top to bottom (`INCREASING_Y`).

You may have noticed that in the example above, there are no explicit checks to verify that writing the file actually succeeded. If the `IlmImf` library detects an error, it throws a C++ exception instead of returning a C-style error code. With exceptions, error handling tends to be easier to get right than with error return values. For instance, a program that calls our `writeRgba1()` function can handle all possible error conditions with a single try/catch block:

```
try
{
    writeRgba1 (fileName, pixels, width, height);
}
catch (const std::exception &exc)
{
    std::cerr << exc.what() << std::endl;
}
```

## 2.2 Writing a Cropped Image

Now we are going to store a cropped image in a file. For this example, we assume that we have a frame buffer that is large enough to hold an image with `width` by `height` pixels, but only part of the frame buffer contains valid data. In the file's header, the size of the whole image is indicated by the display window, `(0, 0) - (width-1, height-1)`, and the data window specifies the region for which valid pixel data exist. Only the pixels in the data window are stored in the file.

```
void
writeRgba2 (const char fileName[],
           const Rgba *pixels,
           int width,
           int height,
           const Box2i &dataWindow)
{
    Box2i displayWindow (V2i (0, 0), V2i (width - 1, height - 1));
    RgbaOutputFile file (fileName, displayWindow, dataWindow, WRITE_RGBA);
    file.setFrameBuffer (pixels, 1, width);
    file.writePixels (dataWindow.max.y - dataWindow.min.y + 1);
}
```

The code above is similar to that in section 2.1, where the whole image was stored in the file. Two things are different, however: When the `RgbaOutputFile` object is created, the data window and the display window are explicitly specified rather than being derived from the image's width and height. The number of scan lines stored in the file by `writePixels()` is equal to the height of the data window instead of the height of the whole image. Since we are using the default `INCREASING_Y` direction for storing the scan lines in the file, `writePixels()` starts at the top of the data window, at `y` coordinate `dataWindow.min.y`, and proceeds toward the bottom, at `y` coordinate `dataWindow.max.y`.

Even though we are storing only part of the image in the file, the frame buffer is still large enough to hold the whole image. In order to save memory, a smaller frame buffer could have been allocated, just big enough to hold the contents of the data window. Assuming that the pixels were still stored in contiguous scan lines, with the `pixels` pointer pointing to the pixel at the upper left corner of the data window, at coordinates `(dataWindow.min.x, dataWindow.min.y)`, the arguments to the `setFrameBuffer()` call would have to be changed as follows:

```
int dwWidth = dataWindow.max.x - dataWindow.min.x + 1;

file.setFrameBuffer
(pixels - dataWindow.min.x - dataWindow.min.y * dwWidth, 1, dwWidth);
```

With these settings, evaluation of

```
base + x * xStride + y * yStride
```

for pixel `(dataWindow.min.x, dataWindow.min.y)` produces

```

pixels - dataWindow.min.x - dataWindow.min.y * dwWidth
+ dataWindow.min.x * 1
+ dataWindow.min.y * dwWidth

= pixels -
- dataWindow.min.x
- dataWindow.min.y * (dataWindow.max.x - dataWindow.min.x + 1)
+ dataWindow.min.x
+ dataWindow.min.y * (dataWindow.max.x - dataWindow.min.x + 1)

= pixels,

```

which is exactly what we want. Similarly, calculating the addresses for pixels (dataWindow.min.x+1, dataWindow.min.y) and (dataWindow.min.x, dataWindow.min.y+1) yields pixels+1 and pixels+dwWidth, respectively.

## 2.3 Storing Custom Attributes

We will now to store an image in a file, and we will add two extra attributes to the image file header: a string, called "comments", and a 4×4 matrix, called "cameraTransform".

```

void
writeRgba3 (const char fileName[],
           const Rgba *pixels,
           int width,
           int height,
           const char comments[],
           const M44f &cameraTransform)
{
    Header header (width, height);
    header.insert ("comments", StringAttribute (comments));
    header.insert ("cameraTransform", M44fAttribute (cameraTransform));

    RgbaOutputFile file (fileName, header, WRITE_RGBA);
    file.setFrameBuffer (pixels, 1, width);
    file.writePixels (height);
}

```

The setFrameBuffer() and writePixels() calls are the same as in the previous examples, but construction of the RgbaOutputFile object is different. The constructors in the previous examples automatically created a header on the fly, and immediately stored it in the file. Here we explicitly create a header and add our own attributes to it. When we create the RgbaOutputFile object, we tell the constructor to use our header instead of creating its own.

In order to make it easier to exchange data between programs written by different people, the IlmImf library defines a set of standard attributes for commonly used data, such as colorimetric information, time and place where an image was recorded, or the owner of an image file's content. For the current list of standard attributes, see the header file ImfStandardAttributes.h. The list is expected to grow over time as OpenEXR users identify new types of data they would like to represent in a standard format. If you need to store some piece of information in an OpenEXR file header, it is probably a good idea to check if a suitable standard attribute exists, before you define a new attribute.

## 2.4 Reading an RGBA Image File

Reading an RGBA image is almost as easy as writing one:

```

void
readRgba1 (const char fileName[],
          Array2D<Rgba> &pixels,
          int &width,
          int &height)
{
    RgbaInputFile file (fileName);
}

```

```

Box2i dw = file.dataWindow();

width  = dw.max.x - dw.min.x + 1;
height = dw.max.y - dw.min.y + 1;
pixels.resizeErase (height, width);

file.setFrameBuffer (&pixels[0][0] - dw.min.x - dw.min.y * width, 1, width);
file.readPixels (dw.min.y, dw.max.y);
}

```

Constructing an `RgbaInputFile` object, passing the name of the file to the constructor, opens the file and reads the file's header.

After asking the `RgbaInputFile` object for the file's data window, we allocate a buffer for the pixels. For convenience, we use the `IlmImf` library's `Array2D` class template (the call to `resizeErase()` does the actual allocation). The number of scan lines in the buffer is equal to the height of the data window, and the number of pixels per scan line is equal to the width of the data window. The pixels are represented as `Rgba` structs.

Note that we ignore the display window in this example; in a program that wanted to place the pixels in the data window correctly in an overall image, the display window would have to be taken into account.

Just as for writing a file, calling `setFrameBuffer()` tells the `RgbaInputFile` object how to access individual pixels in the buffer (see also section 2.2, Writing a Cropped Image, on page 4).

Calling `readPixels()` copies the pixel data from the file into the buffer. If one or more of the R, G, B, and A channels are missing in the file, the corresponding field in the pixels is filled with an appropriate default value. The default value for R, G and B is 0.0, or black; the default value for A is 1.0, or opaque.

Finally, returning from function `readRgba1()` destroys the local `RgbaInputFile` object, thereby closing the file.

Unlike the `RgbaOutputFile`'s `writePixels()` method, `readPixels()` has two arguments. Calling `readPixels(y1,y2)` copies the pixels for all scan lines with y coordinates from `y1` to `y2` into the frame buffer. This allows access to the scan lines in any order. The image can be read all at once, one scan line at a time, or in small blocks of a few scan lines. It is also possible to skip parts of the image.

Note that even though random access is possible, reading the scan lines in the same order as they were written, is more efficient. Random access to the file requires seek operations, which tend to be slow. Calling the `RgbaInputFile`'s `lineOrder()` method returns the order in which the scan lines in the file were written (`INCREASING_Y` or `DECREASING_Y`). If successive calls to `readPixels()` access the scan lines in the right order, the `IlmImf` library reads the file as fast as possible, without seek operations.

## 2.5 Reading an RGBA Image File in Chunks

The following shows how to read an RGBA image in blocks of a few scan lines. This is useful for programs that want to process high-resolution images without allocating enough memory to hold the complete image. These programs typically read a few scan lines worth of pixels into a memory buffer, process the pixels, and store them in another file. The buffer is then re-used for the next set of scan lines. Image operations like color-correction or compositing ("A over B") are very easy to do incrementally this way. With clever buffering of a few extra scan lines, incremental versions of operations that require access to neighboring pixels, like blurring or sharpening, are also possible.

```

void
readRgba2 (const char fileName[])
{
    RgbaInputFile file (fileName);
    Box2i dw = file.dataWindow();

    int width  = dw.max.x - dw.min.x + 1;
    int height = dw.max.y - dw.min.y + 1;
    Array2D<Rgba> pixels (10, width);
}

```

```

while (dw.min.y <= dw.max.y)
{
    file.setFramebuffer (&pixels[0][0] - dw.min.x - dw.min.y * width,
                          1, width);

    file.readPixels (dw.min.y, min (dw.min.y + 9, dw.max.y));
    // processPixels (pixels)

    dw.min.y += 10;
}
}

```

Again, we open the file and read the file header by constructing an `RgbaInputFile` object. Then we allocate a memory buffer that is just large enough to hold ten complete scan lines. We call `readPixels()` to copy the pixels from the file into our buffer, ten scan lines at a time. Since we want to re-use the buffer for every block of ten scan lines, we have to call `setFramebuffer()` before each `readPixels()` call, in order to associate memory address `&pixels[0][0]` first with pixel coordinates `(dw.min.x, dw.min.y)`, then with `(dw.min.x, dw.min.y+10)`, `(dw.min.x, dw.min.y+20)` and so on.

## 2.6 Reading Custom Attributes

In section 2.3, we showed how to store custom attributes in the image file header. Here we show how to test whether a given file's header contains particular attributes, and how to read those attributes' values.

```

void
readHeader (const char fileName[])
{
    RgbaInputFile file (fileName);

    const StringAttribute *comments =
        file.header().findTypedAttribute <StringAttribute> ("comments");

    const M44fAttribute *cameraTransform =
        file.header().findTypedAttribute <M44fAttribute> ("cameraTransform");

    if (comments)
        cout << "comments\n" << comments->value() << endl;

    if (cameraTransform)
        cout << "cameraTransform\n" << cameraTransform->value() << flush;
}

```

As usual, we open the file by constructing an `RgbaInputFile` object. Calling `findTypedAttribute<T>(n)` searches the header for an attribute with type `T` and name `n`. If a matching attribute is found, `findTypedAttribute()` returns a pointer to the attribute. If the header contains no attribute with name `n`, or if the header contains an attribute with name `n`, but the attribute's type is not `T`, `findAttribute()` returns 0. Once we have pointers to the attributes we were looking for, we can access their values by calling the attributes' `value()` methods.

In this example, we handle the possibility that the attributes we want may not exist by explicitly checking for 0 pointers. Sometimes it is more convenient to rely on exceptions instead. Function `typedAttribute()`, a variation of `findTypedAttribute()`, also searches the header for an attribute with a given name and type, but if the attribute in question does not exist, `typedAttribute()` throws an exception rather than returning 0.

Note that the pointers returned by `findTypedAttribute()` point to data that are part of the `RgbaInputFile` object. The pointers become invalid as soon as the `RgbaInputFile` object is destroyed. Therefore, the following will not work:

```

void
readComments (const char fileName[], StringAttribute *&comments)
{
    // error: comments pointer is invalid after this function returns
    RgbaInputFile file (fileName);
    comments = file.header().findTypedAttribute <StringAttribute> ("comments");
}

```

`readComments()` must copy the attribute's value before it returns; for example, like this:

```

void
readComments (const char fileName[], string &comments)
{
    RgbaInputFile file (fileName);
    comments = file.header().typedAttribute<StringAttribute>("comments").value();
}

```

## 2.7 Luminance/Chroma and Gray-Scale Images

Writing an RGBA image file usually preserves the pixels without losing any data; saving an image file and reading it back does not alter the pixels' R, G, B and A values. Most of the time, lossless data storage is exactly what we want, but sometimes file space or transmission bandwidth are limited, and we would like to reduce the size of our image files. It is often acceptable if the numbers in the pixels change slightly as long as the image still looks just like the original.

The RGBA interface in the `IlmImf` library supports storing RGB data in luminance/chroma format. The R, G, and B channels are converted into a luminance channel, Y, and two chroma channels, RY and BY. The Y channel represents a pixel's brightness, and the two chroma channels represent its color. The human visual system's spatial resolution for color is much lower than the spatial resolution for brightness. This allows us to reduce the horizontal and vertical resolution of the RY and BY channels by a factor of two. The visual appearance of the image doesn't change, but the image occupies only half as much space, even before data compression is applied. (For every four pixels, we store four Y values, one RY value, and one BY value, instead of four R, four G, and four B values.)

When opening a file for writing, a program can select how it wants the pixels to be stored. The constructors for class `RgbaOutputFile` have an `rgbaChannels` argument, which determines the set of channels in the file:

<code>WRITE_RGB</code>	red, green, blue
<code>WRITE_RGBA</code>	red, green, blue, alpha
<code>WRITE_YC</code>	luminance, chroma
<code>WRITE_YCA</code>	luminance, chroma, alpha
<code>WRITE_Y</code>	luminance only
<code>WRITE_YA</code>	luminance, alpha

`WRITE_Y` and `WRITE_YA` provide an efficient way to store gray-scale images. The chroma channels for a gray-scale image contain only zeroes, so they can be omitted from the file.

When an image file is opened for reading, class `RgbaInputFile` automatically detects luminance/chroma images and converts the pixels back to RGB format.

### 3 Using the General Interface for Scan-line-based Files

#### 3.1 Writing an Image File

This example demonstrates how to write an OpenEXR image file with two channels: one channel, of type `HALF`, is called `G`, and the other, of type `FLOAT`, is called `Z`. The size of the image is `width` by `height` pixels. The data for the two channels are supplied in two separate buffers, `gPixels` and `zPixels`. Within each buffer, the pixels of each scan line are contiguous in memory.

```
void
writeGZ1 (const char fileName[],
         const half *gPixels,
         const float *zPixels,
         int width,
         int height)
{
    Header header (width, height);           // 1
    header.channels().insert ("G", Channel (HALF)); // 2
    header.channels().insert ("Z", Channel (FLOAT)); // 3

    OutputFile file (fileName, header);      // 4

    FrameBuffer frameBuffer;                 // 5

    frameBuffer.insert ("G",                // name // 6
                       Slice (HALF,         // type  // 7
                              (char *) gPixels, // base  // 8
                              sizeof (*gPixels) * 1, // xStride // 9
                              sizeof (*gPixels) * width)); // yStride // 10

    frameBuffer.insert ("Z",                // name // 11
                       Slice (FLOAT,       // type  // 12
                              (char *) zPixels, // base  // 13
                              sizeof (*zPixels) * 1, // xStride // 14
                              sizeof (*zPixels) * width)); // yStride // 15

    file.setFrameBuffer (frameBuffer);      // 16
    file.writePixels (height);               // 17
}
```

In line 1, an OpenEXR header is created, and the header's display window and data window are both set to `(0, 0) - (width-1, height-1)`.

Lines 2 and 3 specify the names and types of the image channels that will be stored in the file.

Constructing an `OutputFile` object in line 4 opens the file with the specified name, and stores the header in the file.

Lines 5 through 16 tell the `OutputFile` object how the pixel data for the image channels are laid out in memory. After constructing a `FrameBuffer` object, a `Slice` is added for each of the image file's channels. A `Slice` describes the memory layout of one channel. The constructor for the `Slice` object takes four arguments, `type`, `base`, `xStride`, and `yStride`. `type` specifies the pixel data type (`HALF`, `FLOAT`, or `UINT`); the other three arguments define the memory address of pixel `(x, y)` as

```
base + x * xStride + y * yStride.
```

Note that `base` is of type `char*`, and that offsets from `base` are not implicitly multiplied by the size of an individual pixel, as in the `RGBA-only` interface. `xStride` and `yStride` must explicitly take the size of the pixels into account.

With the values specified in our example, the `IlmImf` library computes the address of the `G` channel of pixel `(x, y)` like this:

```

    (half*)((char*)gPixels + x * sizeof(half) * 1 + y * sizeof(half) * width)
= (half*)((char*)gPixels + x * 2 + y * 2 * width),

```

The address of the Z channel of pixel  $(x, y)$  is

```

    (float*)((char*)zPixels + x * sizeof(float) * 1 + y * sizeof(float) * width)
= (float*)((char*)zPixels + x * 4 + y * 4 * width).

```

The `writePixels()` call in line 17 copies the image's pixels from memory into the file. As in the RGBA-only interface, the argument to `writePixels()` specifies how many scan lines are copied into the file (see section 2.1, Writing an RGBA Image File, on page 3).

If the image file contains a channel for which the `FrameBuffer` object has no corresponding `Slice`, then the pixels for that channel in the file are filled with zeroes. If the `FrameBuffer` object contains a `Slice` for which the file has no channel, then the `Slice` is ignored.

Returning from function `writeGZ1()` destroys the local `OutputFile` object and closes the file.

## 3.2 Writing a Cropped Image

Writing a cropped image using the general interface is analogous to writing a cropped image using the RGBA-only interface, as shown in section 2.2, on page 4: In the file's header the data window is set explicitly instead of being generated automatically from the image's width and height. The number of scan lines that are stored in the file is equal to the height of the data window, instead of the height of the entire image. As in section 2.2, the example code below assumes that the memory buffers for the pixels are large enough to hold `width` by `height` pixels, but only the region that corresponds to the data window will be stored in the file. For smaller memory buffers with room only for the pixels in the data window, the `base`, `xStride` and `yStride` arguments for the `FrameBuffer` object's slices would have to be adjusted accordingly (again, see section 2.2).

```

void
writeGZ2 (const char fileName[],
          const half *gPixels,
          const float *zPixels,
          int width,
          int height,
          const Box2i &dataWindow)
{
    Header header (width, height);
    header.dataWindow() = dataWindow;
    header.channels().insert ("G", Channel (HALF));
    header.channels().insert ("Z", Channel (FLOAT));

    OutputFile file (fileName, header);

    FrameBuffer frameBuffer;

    frameBuffer.insert ("G", // name
                       Slice (HALF, // type
                              (char *) gPixels, // base
                              sizeof (*gPixels) * 1, // xStride
                              sizeof (*gPixels) * width)); // yStride

    frameBuffer.insert ("Z", // name
                       Slice (FLOAT, // type
                              (char *) zPixels, // base
                              sizeof (*zPixels) * 1, // xStride
                              sizeof (*zPixels) * width)); // yStride

    file.setFrameBuffer (frameBuffer);
    file.writePixels (dataWindow.max.y - dataWindow.min.y + 1);
}

```

### 3.3 Reading an Image File

In this example, we read an OpenEXR image file using the `IlmImf` library's general interface. We assume that the file contains two channels, R, and G, of type `HALF`, and one channel, Z, of type `FLOAT`. If one of those channels is not present in the image file, the corresponding memory buffer for the pixels will be filled with an appropriate default value.

```
void
readGZ1 (const char fileName[],
        Array2D<half> &rPixels,
        Array2D<half> &gPixels,
        Array2D<float> &zPixels,
        int &width, int &height)
{
    InputFile file (fileName);

    Box2i dw = file.header().dataWindow();
    width = dw.max.x - dw.min.x + 1;
    height = dw.max.y - dw.min.y + 1;

    rPixels.resizeErase (height, width);
    gPixels.resizeErase (height, width);
    zPixels.resizeErase (height, width);

    FrameBuffer frameBuffer;

    frameBuffer.insert ("R", // name
                       Slice (HALF, // type
                              (char *) (&rPixels[0][0] - // base
                                       dw.min.x -
                                       dw.min.y * width),
                              sizeof (rPixels[0][0]) * 1, // xStride
                              sizeof (rPixels[0][0]) * width, // yStride
                              1, 1, // x/y sampling
                              0.0)); // fillValue

    frameBuffer.insert ("G", // name
                       Slice (HALF, // type
                              (char *) (&gPixels[0][0] - // base
                                       dw.min.x -
                                       dw.min.y * width),
                              sizeof (gPixels[0][0]) * 1, // xStride
                              sizeof (gPixels[0][0]) * width, // yStride
                              1, 1, // x/y sampling
                              0.0)); // fillValue

    frameBuffer.insert ("Z", // name
                       Slice (FLOAT, // type
                              (char *) (&zPixels[0][0] - // base
                                       dw.min.x -
                                       dw.min.y * width),
                              sizeof (zPixels[0][0]) * 1, // xStride
                              sizeof (zPixels[0][0]) * width, // yStride
                              1, 1, // x/y sampling
                              FLT_MAX)); // fillValue

    file.setFrameBuffer (frameBuffer);
    file.readPixels (dw.min.y, dw.max.y);
}
```

First, we open the file with the specified name, by constructing an `InputFile` object.

Using the `Array2D` class template, we allocate memory buffers for the image's R, G and Z channels. The buffers are big enough to hold all pixels in the file's data window.

Next, we create a `FrameBuffer` object, which describes our buffers to the `IlmImf` library. For each image channel, we add a slice to the `FrameBuffer`.

As usual, the slice's `type`, `xStride`, and `yStride` describe the corresponding buffer's layout. For the R channel, pixel `(dw.min.x, dw.min.y)` is at address `&rPixels[0][0]`. By setting the `type`, `xStride` and `yStride` of the corresponding `Slice` object as shown above, evaluating

```
base + x * xStride + y * yStride
```

for pixel `(dw.min.x, dw.min.y)` produces

```
(char*)(&rPixels[0][0] - dw.min.x - dw.min.y * width)
+ dw.min.x * sizeof (rPixels[0][0]) * 1
+ dw.min.y * sizeof (rPixels[0][0]) * width

= (char*)&rPixels[0][0]
- dw.min.x * sizeof (rPixels[0][0])
- dw.min.y * sizeof (rPixels[0][0]) * width
+ dw.min.x * sizeof (rPixels[0][0])
+ dw.min.y * sizeof (rPixels[0][0]) * width

= &rPixels[0][0].
```

The address calculations for pixels `(dw.min.x+1, dw.min.y)` and `(dw.min.x, dw.min.y+1)` produce `&rPixels[0][0]+1` and `&rPixels[0][0]+width`, which is equivalent to `&rPixels[0][1]` and `&rPixels[1][0]`.

Each `Slice` has a `fillValue`. If the image file does not contain an image channel for the `Slice`, then the corresponding memory buffer will be filled with the `fillValue`.

The `Slice`'s remaining two parameters, `xSampling` and `ySampling` are used for images where some of the channels are subsampled, for instance, the RY and BY channels in luminance/chroma images. (see section 2.7, Luminance/Chroma and Gray-scale Images, on page 8). Unless an image contains subsampled channels, `xSampling` and `ySampling` should always be set to 1. For details see header files `ImfFrameBuffer.h` and `ImfChannelList.h`.

After describing our memory buffers' layout, we call `readPixels()` to copy the pixel data from the file into the buffers. Just as with the RGBA-only interface, `readPixels()` allows random-access to the scan lines in the file (see section 2.5 Reading an RGBA Image File, on page 6).

### 3.4 Interleaving Image Channels in the Frame Buffer

Here is a variation of the previous example. We are reading an image file, but instead of storing each image channel in a separate memory buffer, we interleave the channels in a single buffer. The buffer is an array of structs, which are defined like this:

```
typedef struct GZ
{
    half g;
    float z;
};
```

The code to read the file is almost the same as before; aside from reading only two instead of three channels, the only difference is how `base`, `xStride` and `yStride` for the `Slices` in the `FrameBuffer` object are computed:

```

void
readGZ2 (const char fileName[],
         Array2D<GZ> &pixels,
         int &width, int &height)
{
    InputFile file (fileName);

    Box2i dw = file.header().dataWindow();
    width = dw.max.x - dw.min.x + 1;
    height = dw.max.y - dw.min.y + 1;
    int dx = dw.min.x;
    int dy = dw.min.y;

    pixels.resizeErase (height, width);

    FrameBuffer frameBuffer;

    frameBuffer.insert ("G",
                       Slice (HALF,
                              (char *) &pixels[-dy][-dx].g,
                              sizeof (pixels[0][0]) * 1,
                              sizeof (pixels[0][0]) * width));

    frameBuffer.insert ("Z",
                       Slice (FLOAT,
                              (char *) &pixels[-dy][-dx].z,
                              sizeof (pixels[0][0]) * 1,
                              sizeof (pixels[0][0]) * width));

    file.setFrameBuffer (frameBuffer);
    file.readPixels (dw.min.y, dw.max.y);
}

```

### 3.5 Which Channels are in a File?

In functions `readGZ1()` and `readGZ2()`, above, we simply assumed that the files we were trying to read contained a certain set of channels. We relied on the `IlmImf` library to do "something reasonable" in case our assumption was not true. Sometimes we want to know exactly what channels are in an image file before reading any pixels, so that we can do what we think is appropriate.

The file's header contains the file's channel list. Using iterators similar to those in the C++ Standard Template Library, we can iterate over the channels:

```

const ChannelList &channels = file.header().channels();

for (ChannelList::ConstIterator i = channels.begin(); i != channels.end(); ++i)
{
    const Channel &channel = i->second;
    // ...
}

```

Channels can also be accessed by name, either with the `[]` operator, or with the `findChannel()` function:

```

const ChannelList &channels = file.header().channels();
const Channel &channel = channels["G"];
const Channel *channelPtr = channels.findChannel("G");

```

The difference between the `[]` operator and `findChannel()` function is how errors are handled: If the channel in question is not present, `findChannel()` returns 0; the `[]` operator throws an exception.

### 3.6 Layers

In an image file with many channels it is sometimes useful to group the channels into *layers*, that is, into sets of channels that logically belong together. Grouping channels into layers is done using a naming convention: channel C in layer L is called L.C.

For example, a computer-generated picture of a 3D scene may contain a separate set of R, G and B channels for the light that originated at each one of the light sources in the scene. Every set of R, G, and B channels is in its own layer. If the layers are called light1, light2, light3, etc., then the full names of the channels in this image are light1.R, light1.G, light1.B, light2.R, light2.G, light2.B, light3.R, and so on.

Layers can be nested; for instance, light1.specular.R refers to the R channel in the specular sub-layer of layer light1.

Channel names that do not contain a ".", or that contain a "." only at the beginning or at the end are not considered to be part of any layer.

Class `ChannelList` has two member functions that support per-layer access to channels: `layers()` returns the names of all layers in a `ChannelList`, and `channelsInLayer()` converts a layer name into a pair of iterators that allows iterating over the channels in the corresponding layer.

The following sample code prints the layers in a `ChannelList` and the channels in each layer:

```
const ChannelList &channels = ... ;

set<string> layerNames;
channels.layers (layerNames);

for (set<string>::const_iterator i = layerNames.begin();
     i != layerNames.end();
     ++i)
{
    cout << "layer " << *i << endl;

    ChannelList::ConstIterator layerBegin, layerEnd;
    channels.channelsInLayer (*i, layerBegin, layerEnd);

    for (ChannelList::ConstIterator j = layerBegin;
         j != layerEnd;
         ++j)
    {
        cout << "\tchannel " << j.name() << endl;
    }
}
```

## 4 Tiles, Levels and Level Modes

A single tiled OpenEXR file can hold multiple versions of an image, each with a different resolution. Each version is called a *level*. A tiled file's *level mode* defines how many levels are stored in the file. There are three different level modes:

ONE_LEVEL	The file contains only a single, full-resolution level. A ONE_LEVEL image file is equivalent to a scan-line-based file; the only difference is that the pixels are accessed by tile instead of by scan line.
MIPMAP_LEVELS	The file contains multiple levels. The first level holds the image at full resolution. Each successive level is half the resolution of the previous level in x and y direction. The last level contains only a single pixel. MIPMAP_LEVELS files are used for texture-mapping and similar applications.
RIPMAP_LEVELS	Like MIPMAP_LEVELS, but with more levels. The levels include all combinations of reducing the resolution of the image by powers of two independently in x and y direction. Used for texture mapping, like MIPMAP_LEVELS. The additional levels in a RIPMAP_LEVELS file can help to accelerate anisotropic filtering during texture lookups.

In MIPMAP\_LEVELS and RIPMAP\_LEVELS mode, the size (width or height) of each level is computed by halving the size of the level with the next higher resolution. If the size of the higher-resolution level is odd, then the size of the lower-resolution level must be rounded up or down in order to avoid arriving at a non-integer width or height. The rounding direction is determined by the file's *level size rounding mode*.

Within each level, the pixels of the image are stored in a two-dimensional array of tiles. The tiles in an OpenEXR file can be any rectangular shape, but all tiles in a file have the same size. This means that lower-resolution levels contain fewer, rather than smaller, tiles.

An OpenEXR file's level mode and rounding mode, and the size of the tiles are stored in an attribute in the file header. The value of this attribute is a `TileDescription` object:

```
enum LevelMode
{
    ONE_LEVEL,
    MIPMAP_LEVELS,
    RIPMAP_LEVELS
};

enum LevelRoundingMode
{
    ROUND_DOWN,
    ROUND_UP
};

class TileDescription
{
public:
    unsigned int    xSize;        // size of a tile in the x dimension
    unsigned int    ySize;        // size of a tile in the y dimension
    LevelMode        mode;
    LevelRoundingMode roundingMode;

    ...                          // (methods omitted)
};
```

## 5 Using the RGBA-only Interface for Tiled Files

### 5.1 Writing a Tiled RGBA Image File with One Resolution Level

Writing a tiled RGBA image with a single level is easy:

```
void
writeTiledRgbaONE1 (const char fileName[],
                   const Rgba *pixels,
                   int width, int height,
                   int tileWidth, int tileHeight)
{
    TiledRgbaOutputFile out (fileName,
                             width, height,           // image size
                             tileWidth, tileHeight,    // tile size
                             ONE_LEVEL,               // level mode
                             ROUND_DOWN,              // rounding mode
                             WRITE_RGBA);             // channels in file // 1

    out.setFrameBuffer (pixels, 1, width);            // 2
    out.writeTiles (0, out.numXTiles() - 1, 0, out.numYTiles() - 1); // 3
}
```

Opening the file and defining the pixel data layout in memory are done in almost the same way as for scan-line-based files:

Construction of the `TiledRgbaOutputFile` object, in line 1, creates an OpenEXR header, sets the header's attributes, opens the file with the specified name, and stores the header in the file. The header's display window and data window are both set to  $(0, 0) - (width-1, height-1)$ . The size of each tile in the file will be `tileWidth` by `tileHeight` pixels. The channel list contains four channels, R, G, B, and A, of type `HALF`.

Line 2 specifies how the pixel data are laid out in memory. The arithmetic involved in calculating the memory address of a specific pixel is the same as for the scan-line-based interface (see section 2.1). We assume that the `pixels` pointer points to an array of `width*height` pixels, which contains the entire image.

Line 3 copies the pixels into the file. The `TiledRgbaOutputFile`'s `writeTiles()` method takes four arguments, `dxMin`, `dyMin`, `dxMax` and `dyMax`; `writeTiles()` writes all tiles that have tile coordinates  $(dx, dy)$ , where  $dxMin \leq dx \leq dxMax$  and  $dyMin \leq dy \leq dyMax$ . The `numXTiles()` method returns the number of tiles in the x direction, and similarly, the `numYTiles()` method returns the number of tiles in the y direction. Thus,

```
out.writeTiles (0, out.numXTiles() - 1, 0, out.numYTiles() - 1);
```

writes the entire image.

This simple method works well when enough memory is available to allocate a frame buffer for the entire image. When allocating a frame buffer for the whole image is not desirable, for example because the image is very large, a smaller frame buffer can be used. Even a frame buffer that can hold only a single tile is sufficient, as demonstrated in the following example:

```
void
writeTiledRgbaONE2 (const char fileName[],
                   int width, int height,
                   int tileWidth, int tileHeight)
{
    TiledRgbaOutputFile out (fileName,
                             width, height,           // image size
                             tileWidth, tileHeight,    // tile size
                             ONE_LEVEL,               // level mode
                             ROUND_DOWN,              // rounding mode
                             WRITE_RGBA);             // channels in file // 1

    Array2D<Rgba> pixels (tileHeight, tileWidth);      // 2
```

```

    for (int tileY = 0; tileY < out.numYTiles (); ++tileY)           // 3
    {
        for (int tileX = 0; tileX < out.numXTiles (); ++tileX)       // 4
        {
            Box2i range = out.dataWindowForTile (tileX, tileY);      // 5

            generatePixels (pixels, width, height, range);            // 6

            out.setFrameBuffer (&pixels[-range.min.y][-range.min.x],
                                1, // xStride
                                tileWidth); // yStride               // 7

            out.writeTile (tileX, tileY);                             // 8
        }
    }
}

```

In line 2 we allocate a `pixels` array with `tileWidth*tileHeight` elements, which is just enough for one tile. Line 5 computes the data window range for each tile, that is, the set of pixel coordinates covered by the tile. The `generatePixels()` function, in line 6, fills the `pixels` array with one tile's worth of image data. The same `pixels` array is reused for all tiles. We must call `setFrameBuffer()`, in line 7, before writing each tile so that the pixels in the array are accessed properly in the `writeTile()` call in line 8. Again, the address arithmetic to access the pixels is the same as for scan-line-based files. The values for the `base`, `xStride`, and `yStride` arguments to the `setFrameBuffer()` call must be chosen so that evaluating the expression

$$\text{base} + x * \text{xStride} + y * \text{yStride}$$

produces the address of the pixel with coordinates  $(x, y)$ .

## 5.2 Writing a Tiled RGBA Image File with Mipmap Levels

In order to store a multiresolution image in a file, we can allocate a frame buffer large enough for the highest-resolution level,  $(0, 0)$ , and reuse it for all levels:

```

void
writeTiledRgbaMIP1 (const char fileName[],
                    int width, int height,
                    int tileWidth, int tileHeight)
{
    TiledRgbaOutputFile out (fileName,
                             width, height,
                             tileWidth, tileHeight,
                             MIPMAP_LEVELS,
                             ROUND_DOWN,
                             WRITE_RGBA);                          // 1

    Array2D<Rgba> pixels (height, width);                            // 2
    out.setFrameBuffer (&pixels[0][0], 1, width);                    // 3

    for (int level = 0; level < out.numLevels (); ++level)           // 4
    {
        generatePixels (pixels, width, height, level);               // 5

        out.writeTiles (0, out.numXTiles (level) - 1,                // 6
                        0, out.numYTiles (level) - 1,
                        level);
    }
}

```

The main difference here is the use of `MIPMAP_LEVELS` in line 1 for the `TiledRgbaOutputFile` constructor. This signifies that the file will contain multiple levels, each level being a factor of 2 smaller in both dimensions than the previous level. Mipmap images contain  $n$  levels, with level numbers

```
(0,0), (1,1), ... (n-1,n-1),
```

where

```
n = floor (log (max (width, height)) / log (2)) + 1
```

if the level size rounding mode is `ROUND_DOWN`, or

```
n = ceil (log (max (width, height)) / log (2)) + 1
```

if the level size rounding mode is `ROUND_UP`. Note that even though level numbers are pairs of integers,  $(l_x, l_y)$ , only levels where  $l_x$  equals  $l_y$  are used in `MIPMAP_LEVELS` files.

Line 2 allocates a `pixels` array with `width` by `height` pixels, big enough to hold the highest-resolution level.

In order to store all tiles in the file, we must loop over all levels in the image (line 4). `numLevels()` returns the number of levels,  $n$ , in our mipmapped image. Since the tile sizes remain the same in all levels, the number of tiles in both dimensions varies between levels. `numXTiles()` and `numYTiles()` take a level number as an optional argument, and return the number of tiles in the  $x$  or  $y$  direction for the corresponding level. Line 5 fills the `pixels` array with appropriate data for each level, and line 6 stores the pixel data in the file.

As with `ONE_LEVEL` images, we can choose to only allocate a frame buffer for a single tile and reuse it for all tiles in the image:

```
void
writeTiledRgbaMIP2 (const char fileName[],
                   int width, int height,
                   int tileWidth, int tileHeight)
{
    TiledRgbaOutputFile out (fileName,
                             width, height,
                             tileWidth, tileHeight,
                             MIPMAP_LEVELS,
                             ROUND_DOWN,
                             WRITE_RGBA);

    Array2D<Rgba> pixels (tileHeight, tileWidth);

    for (int level = 0; level < out.numLevels (); ++level)
    {
        for (int tileY = 0; tileY < out.numYTiles (level); ++tileY)
        {
            for (int tileX = 0; tileX < out.numXTiles (level); ++tileX)
            {
                Box2i range = out.dataWindowForTile (tileX, tileY, level);

                generatePixels (pixels, width, height, range, level);

                out.setFrameBuffer (&pixels[-range.min.y][-range.min.x],
                                   1, // xStride
                                   tileWidth); // yStride

                out.writeTile (tileX, tileY, level);
            }
        }
    }
}
```

The structure of this code is the same as for writing a `ONE_LEVEL` image using a tile-sized frame buffer, but we have to loop over more tiles. Also, `dataWindowForTile()` takes an additional level argument to determine the pixel range for the tile at the specified level.

### 5.3 Writing a Tiled RGBA Image File with Ripmap Levels

The ripmap level mode allows for storing all combinations of reducing the resolution of the image by powers of two independently in both dimensions. Ripmap files contains  $n_x \times n_y$  levels, with level numbers:

```
(0, 0), (1, 0), ... (nx-1, 0),
(0, 1), (1, 1), ... (nx-1, 1),
...
(0, ny-1), (1, ny-1), ... (nx-1, ny-1)
```

where

```
nx = floor (log (width) / log (2)) + 1
ny = floor (log (height) / log (2)) + 1
```

if the level size rounding mode is `ROUND_DOWN`, or

```
nx = ceil (log (width) / log (2)) + 1
ny = ceil (log (height) / log (2)) + 1
```

if the level size rounding mode is `ROUND_UP`.

With a frame buffer that is large enough to hold level  $(0, 0)$ , we can write a ripmap file like this:

```
void
writeTiledRgbaRIP1 (const char fileName[],
                   int width, int height,
                   int tileWidth, int tileHeight)
{
    TiledRgbaOutputFile out (fileName,
                             width, height,
                             tileWidth, tileHeight,
                             RIPMAP_LEVELS,
                             ROUND_DOWN,
                             WRITE_RGBA);

    Array2D<Rgba> pixels (height, width);
    out.setFrameBuffer (&pixels[0][0], 1, width);

    for (int yLevel = 0; yLevel < out.numYLevels (); ++yLevel)
    {
        for (int xLevel = 0; xLevel < out.numXLevels (); ++xLevel)
        {
            generatePixels (pixels, width, height, xLevel, yLevel);

            out.writeTiles (0, out.numXTiles (xLevel) - 1,
                           0, out.numYTiles (yLevel) - 1,
                           xLevel,
                           yLevel);
        }
    }
}
```

As for `ONE_LEVEL` and `MIPMAP_LEVELS` files, the frame buffer doesn't have to be large enough to hold a whole level. Any frame buffer big enough to hold at least a single tile will work.

## 5.4 Reading a Tiled RGBA Image File

Reading a tiled RGBA image file is done similarly to writing one:

```
void
readTiledRgba1 (const char fileName[],
                Array2D<Rgba> &pixels,
                int &width,
                int &height)
{
    TiledRgbaInputFile in (fileName);
    Box2i dw = in.dataWindow();

    width  = dw.max.x - dw.min.x + 1;
    height = dw.max.y - dw.min.y + 1;
    int dx = dw.min.x;
    int dy = dw.min.y;

    pixels.resizeErase (height, width);

    in.setFrameBuffer (&pixels[-dy][-dx], 1, width);
    in.readTiles (0, in.numXTiles() - 1, 0, in.numYTiles() - 1);
}
```

First we need to create a `TiledRgbaInputFile` object for the given file name. We then retrieve information about the data window in order to create an appropriately sized frame buffer, in this case large enough to hold the whole image at level  $(0, 0)$ . After we set the frame buffer, we read the tiles from the file.

This example only reads the highest-resolution level of the image. It can be extended to read all levels, for multiresolution images, by also iterating over all levels within the image, analogous to the examples in sections section 5.2 and 5.3.

## 6 Using the General Interface for Tiled Files

### 6.1 Writing a Tiled Image File

This example is a variation of the one in section 3.1, on page 9. We are writing a `ONE_LEVEL` image file with two channels, G, and Z, of type `HALF`, and `FLOAT` respectively, but here the file is tiled instead of scan-line-based:

```
void
writeTiled1 (const char fileName[],
             Array2D<GZ> &pixels,
             int width, int height,
             int tileWidth, int tileHeight)
{
    Header header (width, height);                                // 1
    header.channels().insert ("G", Channel (HALF));              // 2
    header.channels().insert ("Z", Channel (FLOAT));             // 3

    header.setTileDescription
        (TileDescription (tileWidth, tileHeight, ONE_LEVEL));    // 4

    TiledOutputFile out (fileName, header);                      // 5

    FrameBuffer frameBuffer;                                     // 6

    frameBuffer.insert ("G",                                     // name // 7
                       Slice (HALF,                             // type // 8
                              (char *) &pixels[0][0].g,         // base // 9
                              sizeof (pixels[0][0]) * 1,        // xStride // 10
                              sizeof (pixels[0][0]) * width));   // yStride // 11

    frameBuffer.insert ("Z",                                     // name // 12
                       Slice (FLOAT,                             // type // 13
                              (char *) &pixels[0][0].z,         // base // 14
                              sizeof (pixels[0][0]) * 1,        // xStride // 15
                              sizeof (pixels[0][0]) * width));   // yStride // 16

    out.setFrameBuffer (frameBuffer);                            // 17

    out.writeTiles (0, out.numXTiles() - 1, 0, out.numYTiles() - 1); // 18
}
```

As one would expect, the code here is very similar to the code in section 3.1. The file's header is created in line 1, while lines 2 and 3 specify the names and types of the image channels that will be stored in the file. An important addition is line 4, where we define the size of the tiles and the level mode. In this example we use `ONE_LEVEL` for simplicity. Line 5 opens the file and writes the header. Lines 6 through 17 tell the `TiledOutputFile` object the location and layout of the pixel data for each channel. Finally, line 18 stores the tiles in the file.

### 6.2 Reading a Tiled Image File

Reading a tiled file with the general interface is virtually identical to reading a scan-line-based file, as shown in section 3.4, on page 12; only the last three lines are different. Instead of reading all scan lines at once with a single function call, here we must iterate over all tiles we want to read.

```

void
readTiled1 (const char fileName[],
            Array2D<GZ> &pixels,
            int &width, int &height)
{
    TiledInputFile in (fileName);

    Box2i dw = in.header().dataWindow();
    width = dw.max.x - dw.min.x + 1;
    height = dw.max.y - dw.min.y + 1;
    int dx = dw.min.x;
    int dy = dw.min.y;

    pixels.resizeErase (height, width);

    FrameBuffer frameBuffer;

    frameBuffer.insert ("G",
                        Slice (HALF,
                              (char *) &pixels[-dy][-dx].g,
                              sizeof (pixels[0][0]) * 1,
                              sizeof (pixels[0][0]) * width));

    frameBuffer.insert ("Z",
                        Slice (FLOAT,
                              (char *) &pixels[-dy][-dx].z,
                              sizeof (pixels[0][0]) * 1,
                              sizeof (pixels[0][0]) * width));

    in.setFrameBuffer (frameBuffer);

    in.readTiles (0, in.numXTiles() - 1, 0, in.numYTiles() - 1);
}

```

In this example we assume that the file we want to read contains two channels, G and Z, of type `HALF` and `FLOAT` respectively. If the file contains other channels, we ignore them. We only read the highest-resolution level of the image. If the input file contains more levels (`MIPMAP_LEVELS` or `MIPMAP_LEVELS`), we can access the extra levels by calling a four-argument version of the `readTile()` function,

```
in.readTile (tileX, tileY, levelX, levelY);
```

or by calling a six-argument version of `readTiles()`:

```
in.readTiles (tileXMin, tileXMax, tileYMin, tileYMax, levelX, levelY);
```

## 7 Threads

### 7.1 Library Thread-Safety

The IlmImf library is thread-safe. In a multithreaded application program, multiple threads can concurrently read and write distinct OpenEXR files. In addition, accesses to a single shared file by multiple application threads are automatically serialized. In other words, each thread can independently create, use and destroy its own input and output file objects. Multiple threads can also share a single input or output file. In the latter case the IlmImf library uses mutual exclusion to ensure that only one thread at a time can access the shared file.

### 7.2 Multithreaded I/O

The IlmImf library supports multithreaded file input and output where the library creates its own worker threads that are independent of the application program's threads. When an application thread calls `readPixels()`, `readTiles()`, `writePixels()` or `writeTiles()` to read or write multiple scan lines or tiles at once, the library's worker threads process the tiles or scanlines in parallel.

During startup, the application program must enable multithreading by calling function `setGlobalThreadCount()`. This tells the IlmImf library how many worker threads it should create. (As a special case, setting the number of worker threads to zero reverts to single-threaded operation; reading and writing image files happens entirely in the application thread that calls the IlmImf library.)

The application program should read or write as many scan lines or tiles as possible in each call to `readPixels()`, `readTiles()`, `writePixels()` or `writeTiles()`. This allows the library to break up the work into chunks that can be processed in parallel. Ideally the application reads or writes the entire image using a single read or write call. If the application reads or writes the image one scan line or tile at a time, the library reverts to single-threaded file I/O.

The following function writes an RGBA file using four concurrent worker threads:

```
void
writeRgbaMT (const char fileName[],
             const Rgba *pixels,
             int width,
             int height)
{
    setGlobalThreadCount (4);
    RgbaOutputFile file (fileName, width, height, WRITE_RGBA);
    file.setFrameBuffer (pixels, 1, width);
    file.writePixels (height);
}
```

Except for the call to `setGlobalThreadCount()`, function `writeRgbaMT()` is identical to function `writeRgba1()` in section 2.1 on page 3, but on a computer with multiple processors `writeRgbaMT()` writes files significantly faster than `writeRgba1()`.

### 7.3 Multithreaded I/O, Multithreaded Application Program

Function `setGlobalThreadCount()` creates a global pool of worker threads inside the IlmImf library. If an application program has multiple threads, and those threads read or write several OpenEXR files at the same time, then the worker threads must be shared among the application threads. By default each file will attempt to use the entire worker thread pool for itself. If two files are read or written simultaneously by two application threads, then it is possible that all worker threads perform I/O on behalf of one of the files, while I/O for the other file is stalled.

In order to avoid this situation, the constructors for input and output file objects take an optional `numThreads` argument. This gives the application program more control over how many threads will be kept busy reading or writing a particular file.

For example, we may have an application program that runs on a four-processor computer. The program has one thread that reads files and another one that writes files. We want to keep all four processors busy, and we want to split the processors evenly between input and output. Before creating the input and output threads, the application instructs the IlmImf library to create four worker threads:

```
// main, before application threads are created:
setGlobalThreadCount (4);
```

In the input and output threads, input and output files are opened with `numThreads` set to 2:

```
// application's input thread
InputFile in (fileName, 2);
...

// application's output thread
OutputFile out (fileName, header, 2);
...
```

This ensures that file input and output in the application's two threads can proceed concurrently, without one thread stalling the other's I/O.

## 8 Low-Level I/O

### 8.1 Custom Low-Level File I/O

In all of the previous file reading and writing examples, we were given a file name, and we relied on the constructors for our input file or output file objects to open the file. In some contexts, for example, in a plugin for an existing application program, we may have to read from or write to a file that has already been opened. The representation of the open file as a C or C++ data type depends on the application program and on the operating system.

At its lowest level, the IlmImf library performs file I/O via objects of type `IStream` and `OStream`. `IStream` and `OStream` are abstract base classes. The IlmImf library contains two derived classes, `StdIFStream` and `StdOFStream`, that implement reading from `std::ifstream` and writing to `std::ofstream` objects. An application program can implement alternative file I/O mechanisms by deriving its own classes from `IStream` and `OStream`. This way, OpenEXR images can be stored in arbitrary file-like objects, as long as it is possible to support read, write, seek and tell operations with semantics similar to the corresponding `std::ifstream` and `std::ofstream` methods.

For example, assume that we want to read an OpenEXR image from a C stdio file (of type `FILE *`) that has already been opened. To do this, we derive a new class, `C_IStream`, from `IStream`. The declaration of class `IStream` looks like this:

```
class IStream
{
public:

    virtual ~IStream ();

    virtual bool    read (char c[], int n) = 0;
    virtual Int64   tellg () = 0;
    virtual void    seekg (Int64 pos) = 0;
    virtual void    clear ();
    const char *    fileName () const;

protected:

    IStream (const char fileName[]);

private:

    ...
};
```

Our derived class needs a public constructor, and it must override four methods:

```
class C_IStream: public IStream
{
public:

    C_IStream (FILE *file, const char fileName[]):
        IStream (fileName), _file (file) {}

    virtual bool    read (char c[], int n);
    virtual Int64   tellg ();
    virtual void    seekg (Int64 pos);
    virtual void    clear ();

private:

    FILE *          _file;
};
```

`read(c,n)` reads `n` bytes from the file, and stores them in array `c`. If reading hits the end of the file before `n` bytes have been read, or if an I/O error occurs, `read(c,n)` throws an exception. If `read(c,n)` hits the end of the file after reading `n` bytes, it returns `false`, otherwise it returns `true`:

```
bool
C_IStream::read (char c[], int n)
{
    if (n != fread (c, 1, n, _file))
    {
        // fread() failed, but the return value does not distinguish
        // between I/O errors and end of file, so we call ferror() to
        // determine what happened.

        if (ferror (_file))
            Iex::throwErrnoExc();
        else
            throw Iex::InputExc ("Unexpected end of file.");
    }

    return feof (_file);
}
```

`tellg()` returns the current reading position, in bytes, from the beginning of the file. The next `read()` call will begin reading at the indicated position:

```
Int64
C_IStream::tellg ()
{
    return ftell (_file);
}
```

`seekg(pos)` sets the current reading position to `pos` bytes from the beginning of the file:

```
void
C_IStream::seekg (Int64 pos)
{
    clearerr (_file);
    fseek (_file, pos, SEEK_SET);
}
```

`clear()` clears any error flags that may be set on the file after a `read()` or `seekg()` operation has failed:

```
void
C_IStream::clear ()
{
    clearerr (_file);
}
```

In order to read an RGBA image from an open C stdio file, we first make a `C_IStream` object. Then we create an `RgbaInputFile`, passing the `C_IStream` instead of a file name to the constructor. After that, we read the image as usual (see section 2.4, Reading an RGBA Image File, on page 5):

```

void
readRgbaFILE (FILE *cfile,
              const char fileName[],
              Array2D<Rgba> &pixels,
              int &width,
              int &height)
{
    C_IStream istr (cfile, fileName);
    RgbaInputFile file (istr);

    Box2i dw = file.dataWindow();
    width = dw.max.x - dw.min.x + 1;
    height = dw.max.y - dw.min.y + 1;
    pixels.resizeErase (height, width);
    file.setFrameBuffer (&pixels[0][0] - dw.min.x - dw.min.y * width, 1, width);
    file.readPixels (dw.min.y, dw.max.y);
}

```

## 8.2 Memory-Mapped I/O

When the `IlmImf` library reads an image file, pixel data are copied several times on their way from the file to the application's frame buffer. For compressed files, the time spent copying is usually not significant when compared to how long it takes to uncompress the data. However, when uncompressed image files are being read from a fast file system, it may be advantageous to eliminate one or two copy operations by using memory-mapped I/O.

Memory-mapping establishes a relationship between a file and a program's virtual address space, such that from the program's point of view the file looks like an array of type `char`. The contents of the array match the data in the file. This allows the program to access the data in the file directly, bypassing any copy operations associated with reading the file via a C++ `std::ifstream` or a C `FILE *`.

Classes derived from `IStream` can optionally support memory-mapped input. In order to do this, a derived class must override two virtual functions, `isMemoryMapped()` and `readMemoryMapped()`, in addition to the functions needed for regular, non-memory-mapped input:

```

class MemoryMappedIStream: public IStream
{
public:

    MemoryMappedIStream (const char fileName[]);
    virtual ~MemoryMappedIStream ();

    virtual bool      isMemoryMapped () const;
    virtual char *    readMemoryMapped (int n);
    virtual bool      read (char c[], int n);
    virtual Int64      tellg ();
    virtual void      seekg (Int64 pos);

private:

    char *            _buffer;
    Int64             _fileLength;
    Int64             _readPosition;
};

```

The constructor for class `MemoryMappedIStream` maps the contents of the input file into the program's address space. Memory mapping is not portable across operating systems. The example shown here uses the POSIX `mmap()` system call. On Windows files can be memory-mapped by calling `CreateFileMapping()` and `MapViewOfFile()`:

```

MemoryMappedIStream::MemoryMappedIStream (const char fileName[]):
    IStream (fileName),
    _buffer (0),
    _fileLength (0),
    _readPosition (0)
{
    int file = open (fileName, O_RDONLY);

    if (file < 0)
        THROW_ERRNO ("Cannot open file \"" << fileName << "\".");

    struct stat stat;
    fstat (file, &stat);
    _fileLength = stat.st_size;

    _buffer = (char *) mmap (0, _fileLength, PROT_READ, MAP_PRIVATE, file, 0);
    close (file);

    if (_buffer == MAP_FAILED)
        THROW_ERRNO ("Cannot memory-map file \"" << fileName << "\".");
}

```

The destructor frees the address range associated with the file by un-mapping the file. The POSIX version shown here uses `munmap()`. A Windows version would call `UnmapViewOfFile()` and `CloseHandle()`:

```

MemoryMappedIStream::~MemoryMappedIStream ()
{
    munmap (_buffer, _fileLength);
}

```

Function `isMemoryMapped()` returns true to indicate that memory-mapped input is supported. This allows the `IlmImf` library to call `readMemoryMapped()` instead of `read()`:

```

bool
MemoryMappedIStream::isMemoryMapped () const
{
    return true;
}

```

`readMemoryMapped()` is analogous to `read()`, but instead of copying data into a buffer supplied by the caller, `readMemoryMapped()` returns a pointer into the memory-mapped file, thus avoiding the copy operation:

```

char *
MemoryMappedIStream::readMemoryMapped (int n)
{
    if (_readPosition >= _fileLength)
        throw Iex::InputExc ("Unexpected end of file.");

    if (_readPosition + n > _fileLength)
        throw Iex::InputExc ("Reading past end of file.");

    char *data = _buffer + _readPosition;
    _readPosition += n;
    return data;
}

```

The `MemoryMappedIStream` class must also implement the regular `read()` function, as well as `tellg()` and `seekg()`:

```

bool
MemoryMappedIStream::read (char c[], int n)
{
    if (_readPosition >= _fileLength)
        throw Iex::InputExc ("Unexpected end of file.");

    if (_readPosition + n > _fileLength)
        throw Iex::InputExc ("Reading past end of file.");

    memcpy (c, _buffer + _readPosition, n);
    _readPosition += n;
    return _readPosition < _fileLength;
}

Int64
MemoryMappedIStream::tellg ()
{
    return _readPosition;
}

void
MemoryMappedIStream::seekg (Int64 pos)
{
    _readPosition = pos;
}

```

Class `MemoryMappedIStream` does not need a `clear()` function. Since the memory-mapped file has no error flags that need to be cleared, the `clear()` method provided by class `IStream`, which does nothing, can be re-used.

Memory-mapping a file can be faster than reading the file via a C++ `std::istream` or a C `FILE *`, but the extra speed comes at a cost. A large memory-mapped file can occupy a significant portion of a program's virtual address space. In addition, mapping and un-mapping many files of varying sizes can severely fragment the address space. After a while, the program may be unable to map any new files because there is no contiguous range of free addresses that would be large enough hold a file, even though the total amount of free space would be sufficient. An application program that uses memory-mapped I/O should manage its virtual address space in order to avoid fragmentation. For example, the program can reserve several address ranges, each one large enough to hold the largest file that the program expects to read. The program can then explicitly map each new file into one of the reserved ranges, keeping track of which ranges are currently in use.

## 9 Miscellaneous

### 9.1 Is this an OpenEXR File?

Sometimes we want to test quickly if a given file is an OpenEXR file. This can be done by looking at the beginning of the file: The first four bytes of every OpenEXR file contain the 32-bit integer "magic number" 20000630 in little-endian byte order. After reading a file's first four bytes via any of the operating system's standard file I/O mechanisms, we can compare them with the magic number by explicitly testing if the bytes contain the values 0x76, 0x2f, 0x31, and 0x01.

Given a file name, the following function returns `true` if the corresponding file exists, is readable, and contains an OpenEXR image:

```
bool
isThisAnOpenExrFile (const char fileName[])
{
    std::ifstream f (fileName, std::ios_base::binary);

    char b[4];
    f.read (b, sizeof (b));

    return !!f && b[0] == 0x76 && b[1] == 0x2f && b[2] == 0x31 && b[3] == 0x01;
}
```

Using this function does not require linking with the `IlmImf` library.

Programs that are linked with the `IlmImf` library can determine if a given file is an OpenEXR file by calling one of the following functions, which are part of the library:

```
bool isOpenExrFile (const char fileName[], bool &isTiled);
bool isOpenExrFile (const char fileName[]);
bool isTiledOpenExrFile (const char fileName[]);
bool isOpenExrFile (IStream &is, bool &isTiled);
bool isOpenExrFile (IStream &is);
bool isTiledOpenExrFile (IStream &is);
```

### 9.2 Is this File Complete?

Sometimes we want test if an OpenEXR file is complete. The file may be missing pixels, either because writing the file is still in progress or because writing was aborted before the last scan line or tile was stored in the file. Of course, we could test if a given file is complete by attempting to read the entire file, but the input file classes in the `IlmImf` library have an `isComplete()` method that is faster and more convenient. The following function returns `true` or `false`, depending on whether a given OpenEXR file is complete or not:

```
bool
isComplete (const char fileName[])
{
    InputFile in (fileName);
    return in.isComplete();
}
```

### 9.3 Preview Images

Graphical user interfaces for selecting image files often represent files as small *preview* or *thumbnail* images. In order to make loading and displaying the preview images fast, OpenEXR files support storing preview images in the file headers.

A preview image is an attribute whose value is of type `PreviewImage`. A `PreviewImage` object is an array of pixels of type `PreviewRgba`. A pixel has four components, `r`, `g`, `b` and `a`, of type `unsigned char`, where `r`, `g` and `b` are the pixel's red, green and blue components, encoded with a gamma of 2.2. `a` is the pixel's alpha channel; `r`, `g` and `b` should be premultiplied by `a`. On a typical display with 8-bits per component, the preview image can be shown by simply loading the `r`, `g` and `b` components into the display's frame buffer. (No gamma correction or tone mapping is required.)

The code fragment below shows how to test if an OpenEXR file has a preview image, and how to access a preview image's pixels:

```
RgbaInputFile file (fileName);

if (file.header().hasPreviewImage())
{
    const PreviewImage &preview = file.header().previewImage();

    for (int y = 0; y < preview.height(); ++y)
        for (int x = 0; x < preview.width(); ++x)
        {
            const PreviewRgba &pixel = preview.pixel (x, y);
            ...
        }
}
```

Writing an OpenEXR file with a preview image is shown in the following example. Since the preview image is an attribute in the file's header, it is entirely separate from the main image. Here the preview image is a smaller version of the main image, but this is not required; in some cases storing an easily recognizable icon may be more appropriate. This example uses the RGBA-only interface to write a scan-line based file, but preview images are also supported for files that are written using the general interface, and for tiled files.

```
void
writeRgbaWithPreview1 (const char fileName[],
                      const Array2D<Rgba> &pixels,
                      int width,
                      int height)
{
    Array2D <PreviewRgba> previewPixels;           // 1
    int previewWidth;                             // 2
    int previewHeight;                            // 3

    makePreviewImage (pixels, width, height,       // 4
                     previewPixels, previewWidth, previewHeight);

    Header header (width, height);                // 5

    header.setPreviewImage                        // 6
        (PreviewImage (previewWidth, previewHeight, &previewPixels[0][0]));

    RgbaOutputFile file (fileName, header, WRITE_RGBA); // 7
    file.setFrameBuffer (&pixels[0][0], 1, width); // 8
    file.writePixels (height);                    // 9
}
```

Lines 1 through 4 generate the preview image. Line 5 creates a header for the image file. Line 6 converts the preview image into a `PreviewImage` attribute, and adds the attribute to the header. Lines 7 through 9 store the header (with the preview image) and the main image in a file.

Function `makePreviewImage()`, called in line 4, generates the preview image by scaling the main image down to one eighth of its original width and height:

```
void
makePreviewImage (const Array2D<Rgba> &pixels,
                  int width,
                  int height,
                  Array2D<PreviewRgba> &previewPixels,
                  int &previewWidth,
                  int &previewHeight)
{
    const int N = 8;

    previewWidth = width / N;
    previewHeight = height / N;
    previewPixels.resizeErase (previewHeight, previewWidth);

    for (int y = 0; y < previewHeight; ++y)
    {
        for (int x = 0; x < previewWidth; ++x)
        {
            const Rgba &inPixel = pixels[y * N][x * N];
            PreviewRgba &outPixel = previewPixels[y][x];

            outPixel.r = gamma (inPixel.r);
            outPixel.g = gamma (inPixel.g);
            outPixel.b = gamma (inPixel.b);
            outPixel.a = int (clamp (inPixel.a * 255.f, 0.f, 255.f) + 0.5f);
        }
    }
}
```

To make this example easier to read, scaling the image is done by just sampling every eighth pixel of every eighth scan line. This can lead to aliasing artifacts in the preview image; for a higher-quality preview image, the main image should be lowpass-filtered before it is subsampled.

Function `makePreviewImage()` calls `gamma()` to convert the floating-point red, green, and blue components of the sampled main image pixels to unsigned char values. `gamma()` is a simplified version of what the `exrdisplay` program does in order to show an OpenEXR image's floating-point pixels on the screen (for details, see `exrdisplay`'s source code):

```
unsigned char
gamma (float x)
{
    x = pow (5.5555f * max (0.f, x), 0.4545f) * 84.66f;
    return (unsigned char) clamp (x, 0.f, 255.f);
}
```

`makePreviewImage()` converts the pixels' alpha component to unsigned char by linearly mapping the range `[0.0, 1.0]` to `[0, 255]`.

Some programs write image files one scan line or tile at a time, while the image is being generated. Since the image does not yet exist when the file is opened for writing, it is not possible to store a preview image in the file's header at this time (unless the preview image is an icon that has nothing to do with the main image). However, it is possible to store a blank preview image in the header when the file is opened. The preview image can then be updated as the pixels become available. This is demonstrated in the following example:

```

void
writeRgbaWithPreview2 (const char fileName[],
                      int width,
                      int height)
{
    Array <Rgba> pixels (width);

    const int N = 8;

    int previewWidth = width / N;
    int previewHeight = height / N;
    Array2D <PreviewRgba> previewPixels (previewHeight, previewWidth);

    Header header (width, height);
    header.setPreviewImage (PreviewImage (previewWidth, previewHeight));

    RgbaOutputFile file (fileName, header, WRITE_RGBA);
    file.setFrameBuffer (pixels, 1, 0);

    for (int y = 0; y < height; ++y)
    {
        generatePixels (pixels, width, height, y);
        file.writePixels (1);

        if (y % N == 0)
        {
            for (int x = 0; x < width; x += N)
            {
                const Rgba &inPixel = pixels[x];
                PreviewRgba &outPixel = previewPixels[y / N][x / N];

                outPixel.r = gamma (inPixel.r);
                outPixel.g = gamma (inPixel.g);
                outPixel.b = gamma (inPixel.b);
                outPixel.a = int (clamp (inPixel.a * 255.f, 0.f, 255.f) + 0.5f);
            }
        }

        file.updatePreviewImage (&previewPixels[0][0]);
    }
}

```

## 9.4 Environment Maps

An environment map is an image that represents an omnidirectional view of a three-dimensional scene as seen from a particular 3D location. Every pixel in the image corresponds to a 3D direction, and the data stored in the pixel represent the amount of light arriving from this direction. In 3D rendering applications, environment maps are often used for image-based lighting techniques that approximate how objects are illuminated by their surroundings. Environment maps with enough dynamic range to represent even the brightest light sources in the environment are sometimes called "light probe images."


In an OpenEXR file, an environment map is stored as a rectangular pixel array, just like any other image, but an attribute in the file header indicates that the image is an environment map. The attribute's value, which is of type `Envmap`, specifies the relation between 2D pixel locations and 3D directions. `Envmap` is an enumeration type. Two values are possible:

`ENVMAP_LATLONG`

**Latitude-Longitude Map:** The environment is projected onto the image using polar coordinates (latitude and longitude). A pixel's x coordinate corresponds to its longitude, and the y coordinate corresponds to its latitude. The pixel in the upper left corner of the data window has latitude  $+\pi/2$  and longitude  $+\pi$ ; the pixel in the lower right corner has latitude  $-\pi/2$  and longitude  $-\pi$ .

In 3D space, latitudes  $-\pi/2$  and  $+\pi/2$  correspond to the negative and positive y direction. Latitude 0, longitude 0 points in the positive z direction; latitude 0, longitude  $\pi/2$  points in the positive x direction.


For a latitude-longitude map, the size of the data window should be  $2 \times N$  by  $N$  pixels (width by height), where  $N$  can be any integer greater than 0.

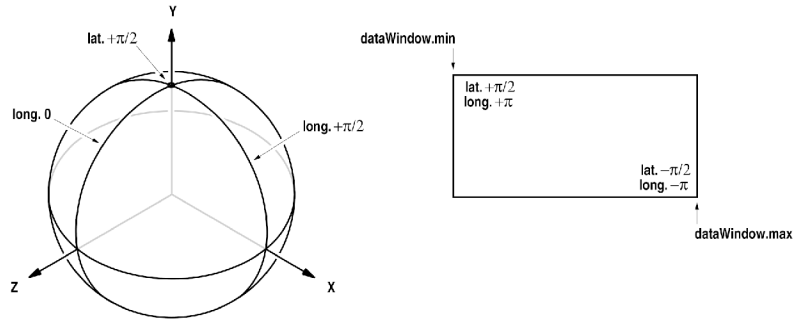

#### ENVMAP\_CUBE

Cube Map: The environment is projected onto the six faces of an axis-aligned cube. The cube's faces are then arranged in a 2D image as shown below.

For a cube map, the size of the data window should be  $N$  by  $6 \times N$  pixels (width by height), where  $N$  can be any integer greater than 0.

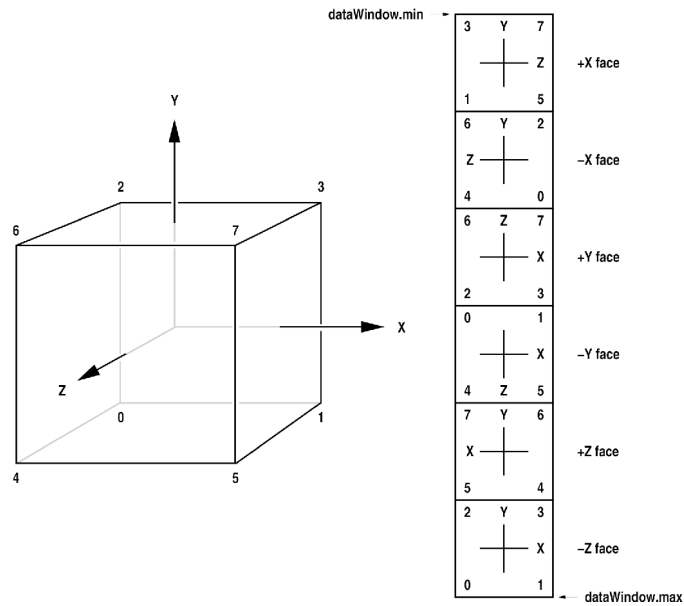

Note that both kinds of environment maps contain redundant pixels: In a latitude-longitude map, the top row and the bottom row of pixels correspond to the map's north pole and south pole (latitudes  $+\pi/2$  and  $-\pi/2$ ). In each of those two rows all pixels are the same. The leftmost column and the rightmost column of pixels both correspond to the meridian with longitude  $+\pi$  (or, equivalently,  $-\pi$ ). The pixels in the leftmost column are repeated in the rightmost column. In a cube-face map, the pixels along each edge of a face are repeated along the corresponding edge of the adjacent face. The pixel in each corner of a face is repeated in the corresponding corners of the two adjacent faces.

The following code fragment tests if an OpenEXR file contains an environment map, and if it does, which kind:

```
RgbaInputFile file (fileName);

if (hasEnvmap (file.header()))
{
    Envmap type = envmap (file.header());
    ...
}
```

For each kind of environment map, the `IlmImf` library provides a set of routines that convert from 3D directions to 2D floating-point pixel locations and back. Those routines are useful in application programs that create environment maps and in programs that perform map lookups. For details, see header file `ImfEnvmap.h`.